

FA33200-XXX




PART NUMBER

NUMBER OF SMPs IN FLANGE
12 OR 15

AIR SIDE TERMINATION
eg. F=FULL
S=SMOOTH
L=LIMITED

VACUUM SIDE TERMINATION
eg. F=FULL
S=SMOOTH
L=LIMITED

PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	500V RMS
INSULATION RESISTANCE:	> 5000 MΩ
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-65°C TO 165°C

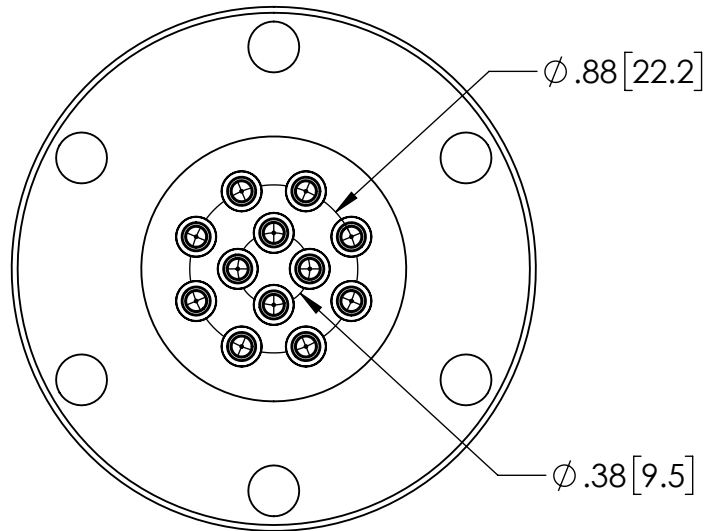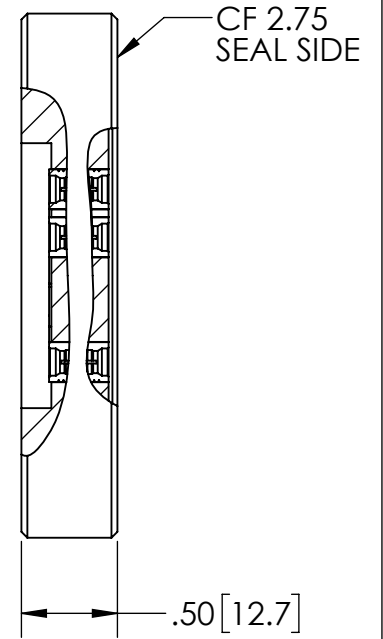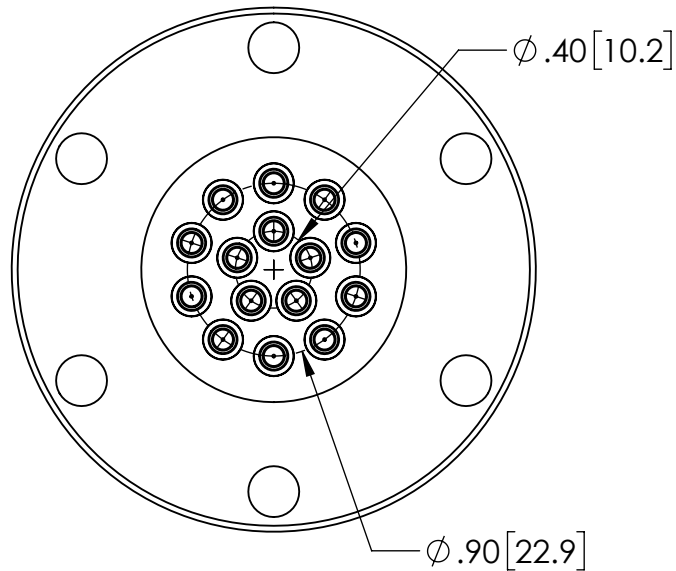


LEAK RATE <1 X 10E-10 ATM-CC/SEC (He)

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

50 OHM SMP IN 2.75 CF FLANGE



SOLID SEALING TECHNOLOGY, INC.

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	12/18/2015
B1	JF	06/18/2018	COSM0003-61		ENG APPR.	JF	01/26/2016

PART NO. FA33200 REV. B

SALES DWG NO. FA33200SL REV. B1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.