


FA33218-XXX

PART NUMBER

NUMBER OF SMPs IN FLANGE  
9 OR 12

AIR SIDE TERMINATION  
eg. F=FULL  
S= SMOOTH  
L= LIMITED

VACUUM SIDE TERMINATION  
eg. F=FULL  
S= SMOOTH  
L= LIMITED

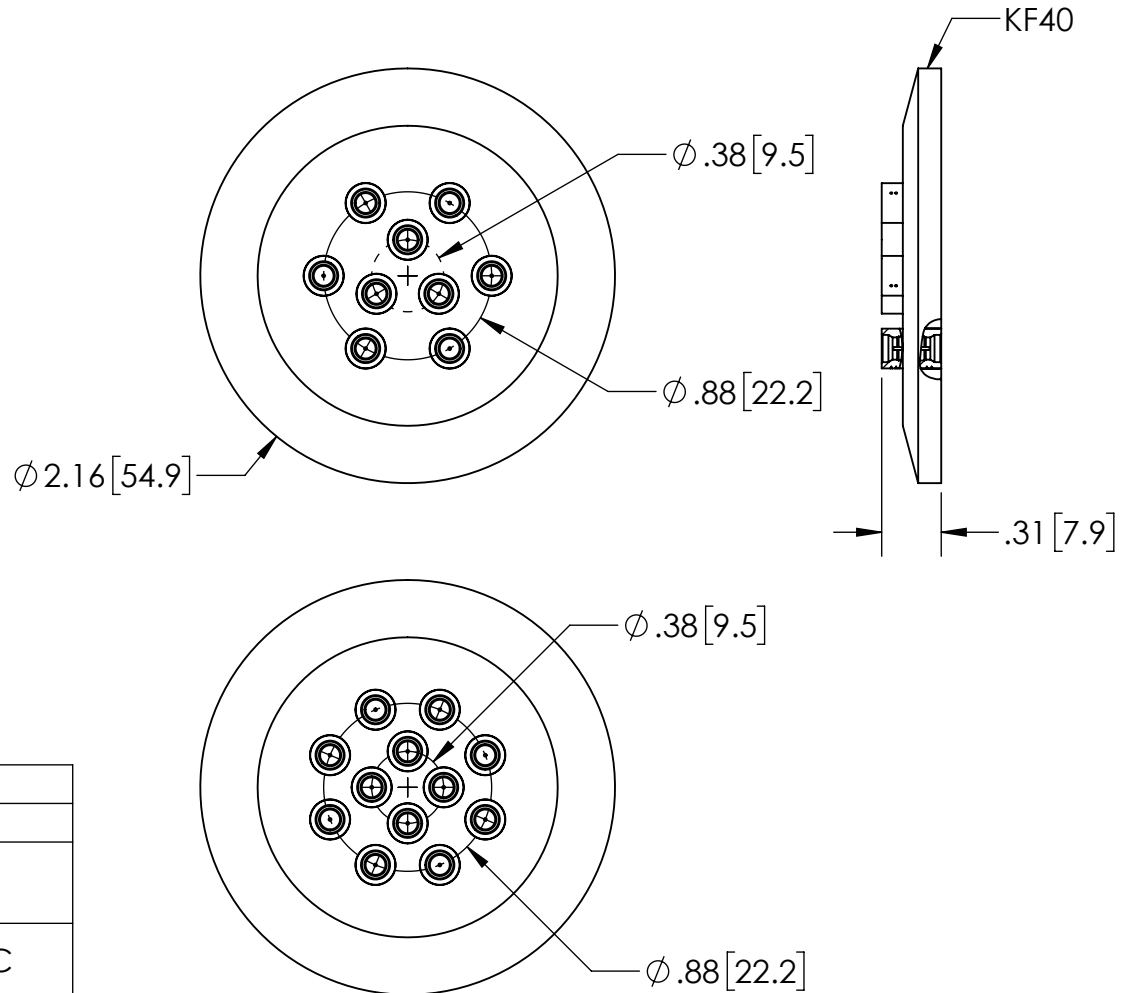


PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	500V RMS
INSULATION RESISTANCE:	> 5000 MΩ
TEMPERATURE WITHOUT PLUG:	-25°C TO 205°C
TEMPERATURE WITH PLUG:	-25°C TO 165°C

LEAK RATE <1 X 10E-10 ATM-CC/SEC (He)

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:  
50 OHM SMP IN KF40 FLANGE



REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	1/11/2016
A2	JF	06/14/2018	COSM0005-11		ENG APPR.	JF	01/26/2016

PART NO. FA33218 REV. A

SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA33218SL REV. A2

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***